

Gensets

Medium Range


Perkins

LEROY SOMER

PT200 - PT220S

Ratings @ 0.8 PF		Prime Rating	Stand-by Rating
Voltage* ¹	Frequency* ²	PT 200* ³	PT 220* ⁴
230/400 V	50 Hz	200 KVA	220 KVA
-	-	-	-

The above ratings represent the generating set capability guaranteed within ±3% at the reference conditions equivalent to those specified in ISO 8528/1.

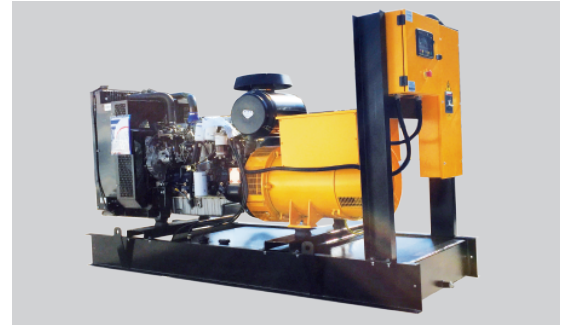

Notes

- The applicable voltage range is 380V to 415V for 50Hz applications. For other voltage consult factory.
- This generating set is of fixed speed of 1500rpm.
- PT200 is the prime power rating of the generating set, where a variable load and unlimited hours usage are applied on the generating set with an average load factor of 80% of the prime rating over each 24 hour period. Noting that a 10% overload is available for 1 hour in every 12 hours operation.
- PT220S is the standby power rating of the generating set, where a variable load limited to an annual usage up to 500 hours is applied, with 300 hours of which may be continuous running. Noting that no overload is permitted.

Certifications



- The complete Generating Set is type-tested according to ISO 8528-8 Standard.



- The control panel is certified by an ISO 17025 accredited laboratory to have IP55 according to IEC 60355



Quality ISO 9001 SAI GLOBAL

Dimensions

Length	2700 mm
Width	990 mm
Height	1750 mm
Weight	2084 Kg

Technical Data

Engine model	Perkins 1106A-70TAG4	
Cylinders	6 - vertical in-line	
Aspiration	Turbocharged & Aftercooled	
Combustion	Direct injection	
Cooling System	Water cooled	
Displacement	7.01 liters	
Oil consumption	0.1 % of fuel consumption	
Lube oil capacity	16.5 liters	
Coolant capacity	21 liters	
Governor	Electronic	
Speed	1500 rpm	1800 rpm
Fuel Consumption @ 100% Load	45.8 L/H	- L/H
Fuel Consumption @ 75% Load	34.7 L/H	- L/H
Fuel Consumption @ 50% Load	23.1 L/H	- L/H
Radiator Cooling Air Flow	282 m3/min	- m3/min
Max exhaust gas flow	36.8 m3/min	- m3/min
Emissions regulations	For unregulated territories	

The above performance data are valid as per the following specs:

- Diesel Fuel is according to BS2869 Class A2 or equivalent.
- Lubricating oil is according to API CH4 (15W/40).
- The coolant should be 50% antifreeze and 50% distilled water.

Alternator model **LeroySomertAL 046B**

Regulation	± 0.5 % IP23	
International protection	H	
Insulation class	6 or 12	
Terminals		
Frequency	50 Hz	60 Hz
Coolant Air flow	0.48 m3/s	- m3/s